


### **Standard fixed swanneck tap**

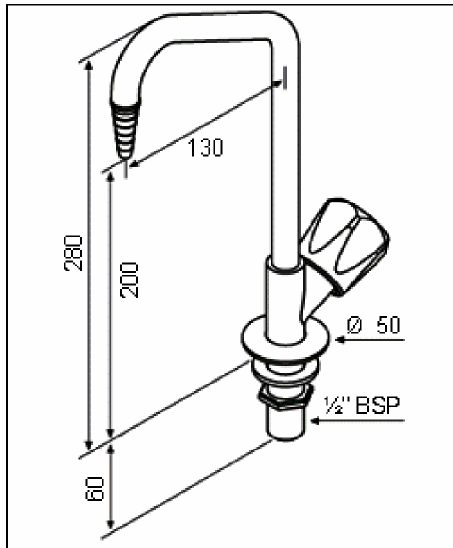

**Part No:** 800101HW-GA: Hot water left hand  
800103CW-GA : Cold water right hand.

**Description:** Fixed swanneck tap with fixed serrated nozzles.

**Applications:** Standard laboratory water tap for all applications where header tank supply is present ( Full WRAS approval )

**Options:** Removable or full bore nozzles are available on request.

**Construction:** All brass body "Rilsan" plastic coated, light grey ( RAL 7035 ).

Chemical resistant plastic ABS handwheel, Identification coding to DIN13792

**Connection and mounting:** 1/2" BSP male flat ended shank x 60mm long with back nut.

Standard anti-rotation base with location pin. Two mounting holes 22mm dia and 6mm dia required template enclosed.

**Pressure and Flow:** Maximum pressure 100PSI ( Recommended 20PSI )

Flow Rate @ 20 psi = 12 Litre/min.

**Spares:**

Handwheel Assembly, Pt No 960200

Valve headwork, Pt No 950148